




General Installation Guidelines for Eljen Geotextile Sand Filter Systems

Pumped System Installation

- 1 Prepare disposal site as described in the appropriate system configuration as listed above.
- 2 Provide a well-anchored distribution box with a velocity reduction tee or baffle. Set distribution box to elevation according to state or local regulations.
- 3 Set pump chamber floats or control panel to deliver a maximum of 4 gallons per B43 module per dosing cycle, or 3 gallons per A42 module per dosing cycle.
- 4 GSF system assembly is the same as for gravity designs in the appropriate system configuration.
- 5 For pressure distribution systems, please contact Eljen Corporation's Technical Resource Department for additional information on design and installation guidelines at 1-800-444-1359.

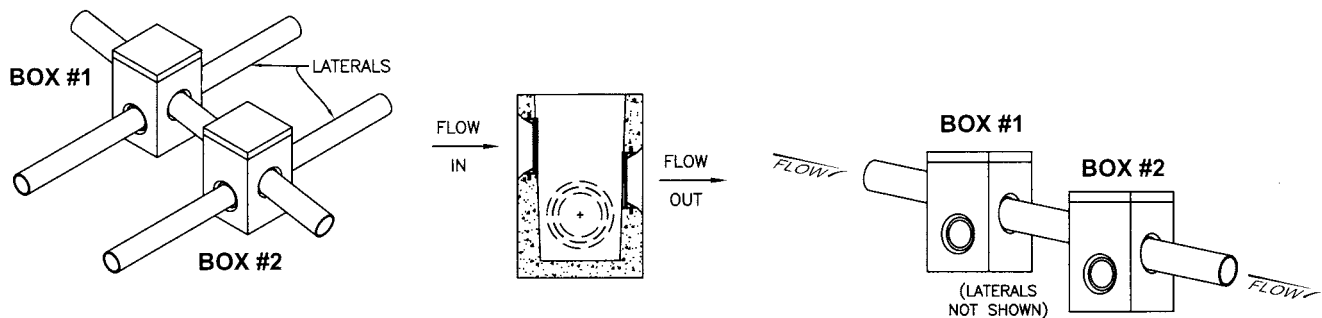

Step 2—Pumped System Installation

For more information, please contact
your local distributor, or Eljen:
1-800-444-1359
info@eljen.com

www.eljen.com



Innovative Environmental Products and Solutions Since 1970